



<b>Motor Rated Power</b>			<b>6500W</b>	
<b>Inverter Power Supply</b>			<b>400Vdc</b>	
<b>Description</b>	<b>Symbol</b>	<b>Unit</b>		
Duty	-	-	S2-60'	
Nominal Speed	$n_n$	rpm	3500	
Frequency (N° poles)	$f (2p)$	Hz	233.3 (8)	
Constant Voltage	$K_e$	Vrms/Krpm	61.0	
Instant Torque	$T_i$	Nm	48.0	
Instant Current	$I_i$	Arms	68.0	
Peak Torque S2-5'	$T_p$	Nm	33.0	
Peak Current S2-5'	$I_p$	Arms	36.0	
Peak Torque S2-30'	$T_p$	Nm	21.5	
Peak Current S2-30'	$I_p$	Arms	25.0	
Rated Torque S2-60'	$T_r$	Nm	17.5	
Rated Current S2-60'	$I_r$	Arms	18.0	
Short Circuit Current	$I_{sc}$	Arms	21.0	
Rotor Inertia	$J_r$	kg x m <sup>2</sup>	0.0057	
Ambient Temperature	$\theta_a$	°C	-15 ÷ +40	
Protection Degree	IP		IP 54	up to IP67
Insulation Class	-	-	F	
Thermal protection	-	-	PTY 84-130	Alternative to KTY 84-130

Speed-Torque & Speed Power Motor Curves (\*)

**SMAC 200-035**

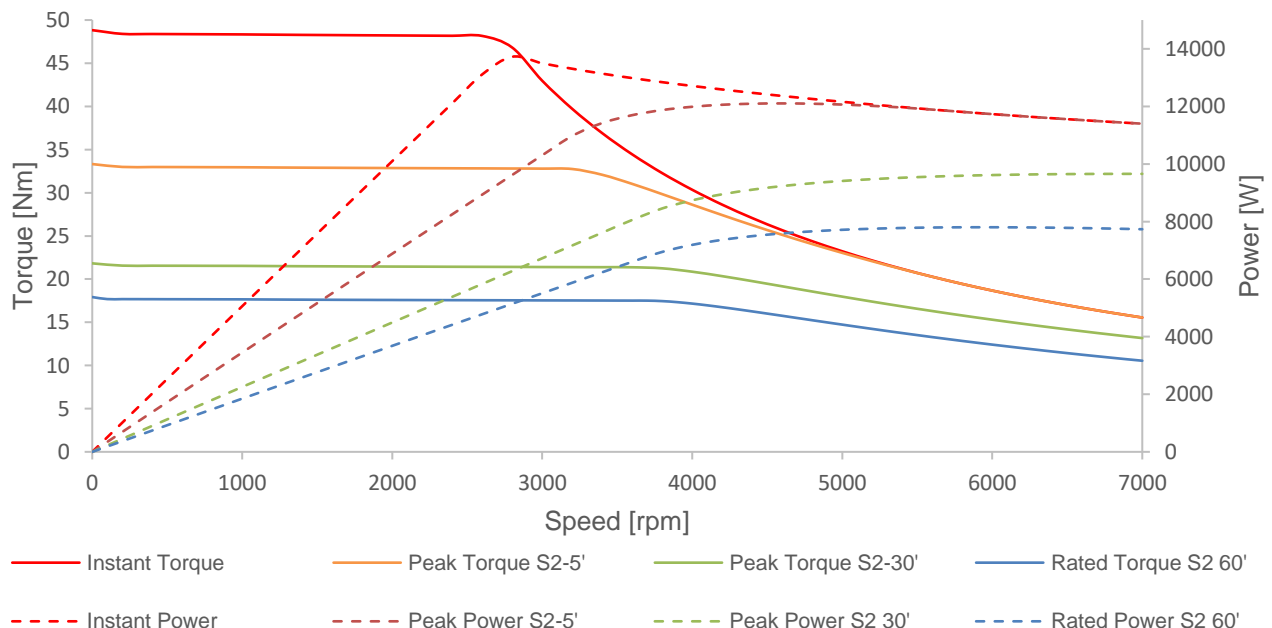


Current Map [Arms]

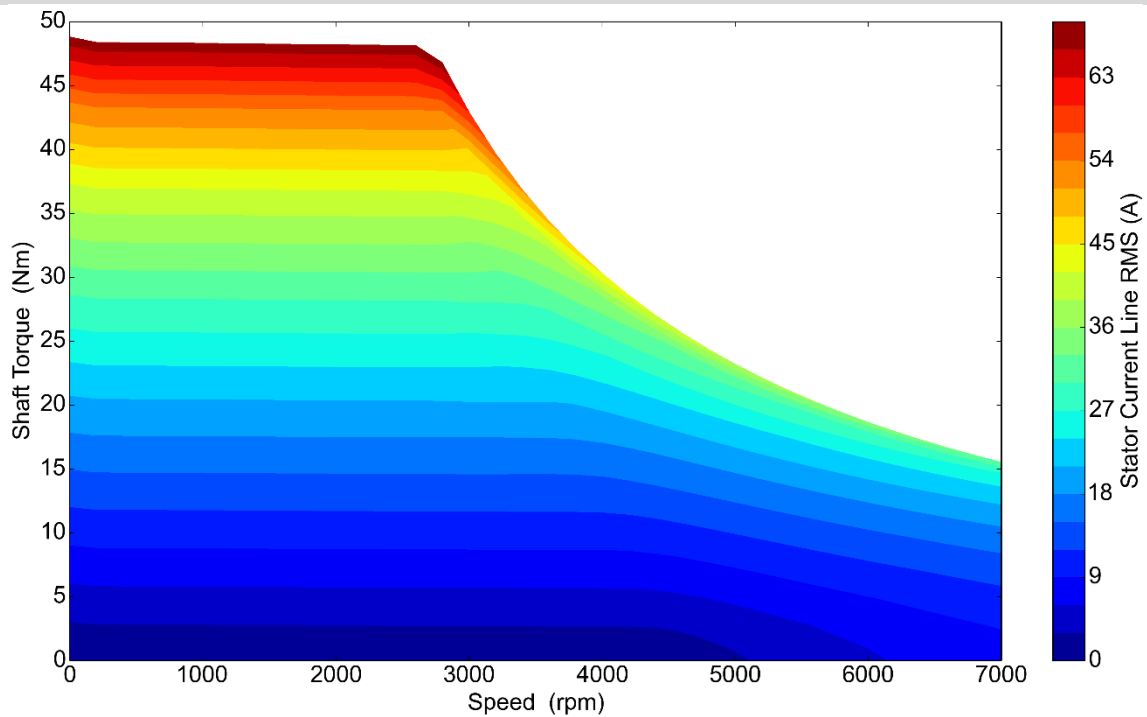

\* MTPA – MTPV Field Weakening strategy control & Optimized Advance Angle  
(Ref. Simulation temperature 20.0°C)

Simulation Only

Efficiency Map % (\*)

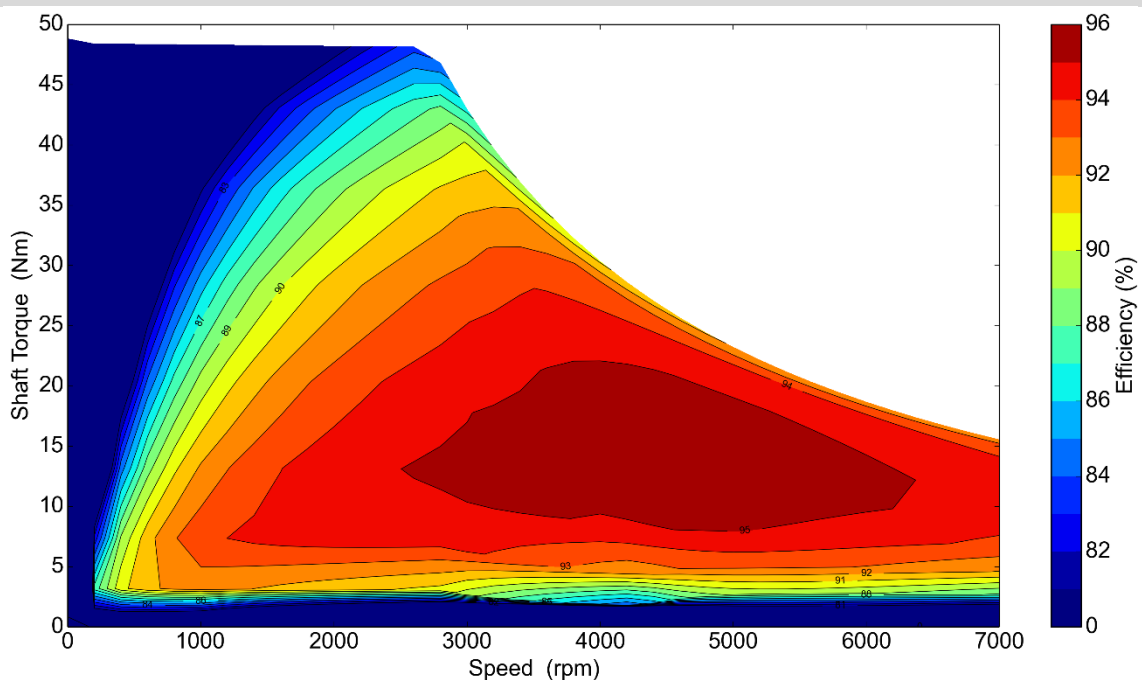

Nota bene / Disclaimer

Il presente documento ha il solo scopo di fornire un'indicazione generale delle prestazioni. In fase di scelta contattare Ufficio Tecnico e-comer"  
*This document has only the purpose of providing a general indication of performance. In the phase of selection, please, contact Technical Department of e-comer.*

Questo documento è proprietà di **e-comer**, non può essere usato, riprodotto o reso noto a terzi, senza autorizzazione scritta.  
*This document is a e-comer property. All rights reserved. No design, or parts of them, may transmitted in any form.*

SIMULATED DATA