

<b>Motor Rated Power</b>	<b>8000W</b>
--------------------------	--------------

<b>Inverter Power Supply</b>	<b>800Vdc</b>
------------------------------	---------------


Description	Symbol	Unit	
Duty	-	-	S1
Nominal Speed	$n_n$	rpm	3500
Frequency (N° poles)	$f (2p)$	Hz	233.3 (8)
Constant Voltage	$K_e$	Vrms/Krpm	120.0
Instant Torque	$T_i$	Nm	48.0
Instant Current	$i_i$	Arms	34.0
Rated Torque S1	$T_r$	Nm	22.0
Rated Current S1	$I_r$	Arms	11.5

Short Circuit Current	$I_{SC}$	Arms	11.0
Rotor Inertia	$J_r$	kg x m <sup>2</sup>	0.0057
Ambient Temperature	$\theta_a$	°C	-15 ÷ +40
Protection Degree	IP		IP 54 up to IP67
Insulation Class	-	-	F
Thermal protection	-	-	PTY 84-130 Alternative to KTY 84-130

Cooling system	Liquid
----------------	--------


Speed-Torque & Speed Power Motor Curves (\*)

**SMAC 200-035**

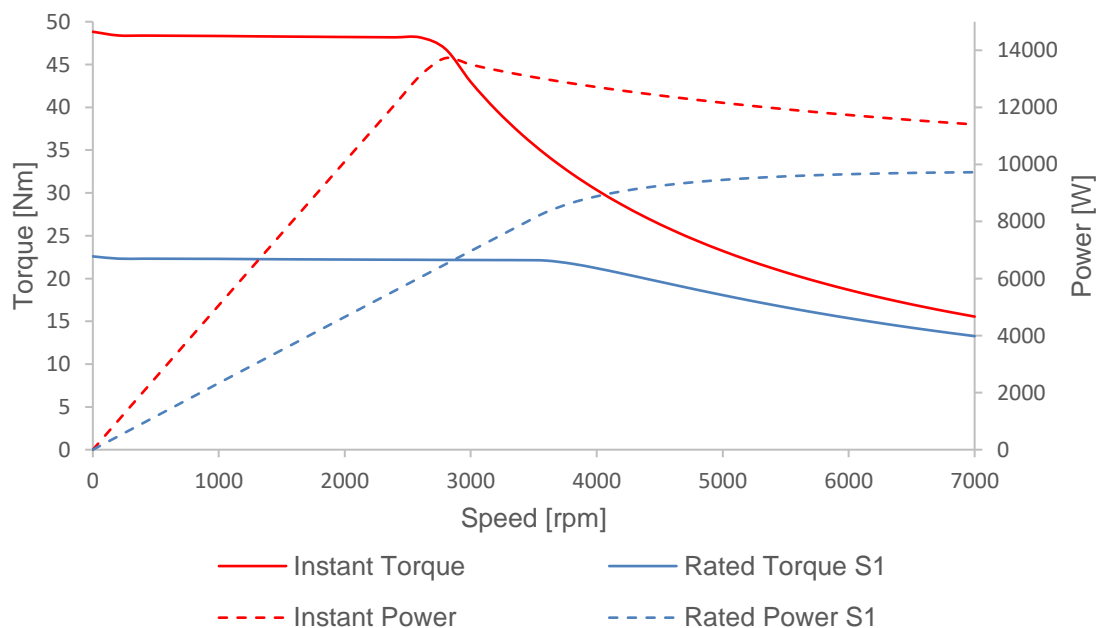


SIMULATED DATA

Current Map [Arms]

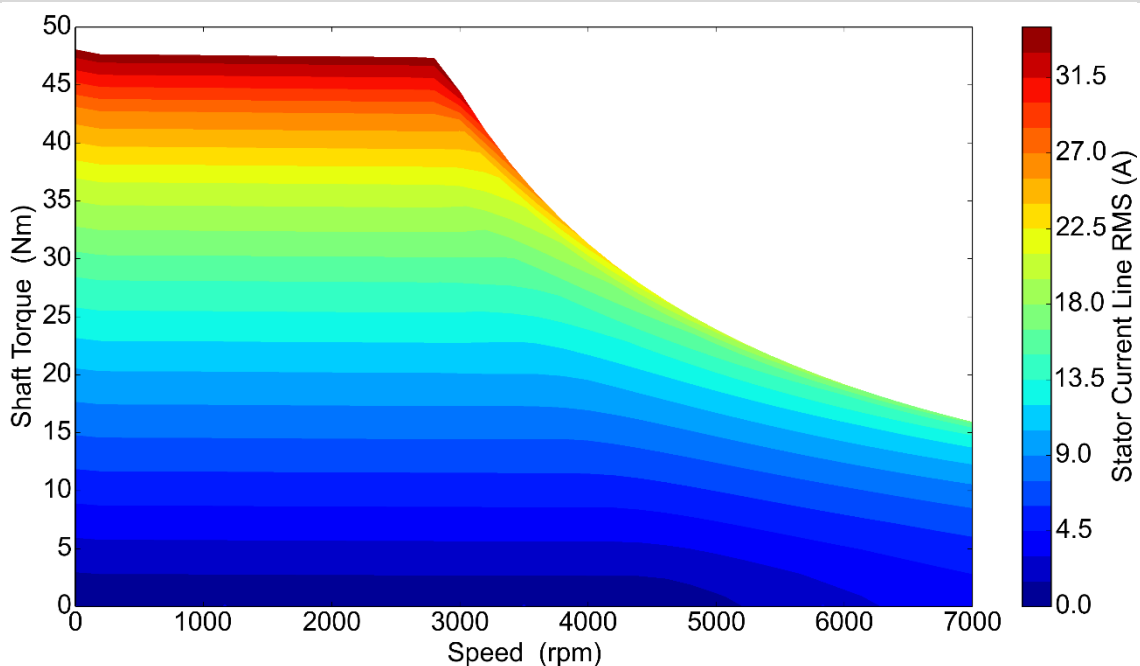

\* MTPA – MTPV Field Weakening strategy control & Optimized Advance Angle  
(Ref. Simulation temperature 20.0°C)

Efficiency Map % (\*)

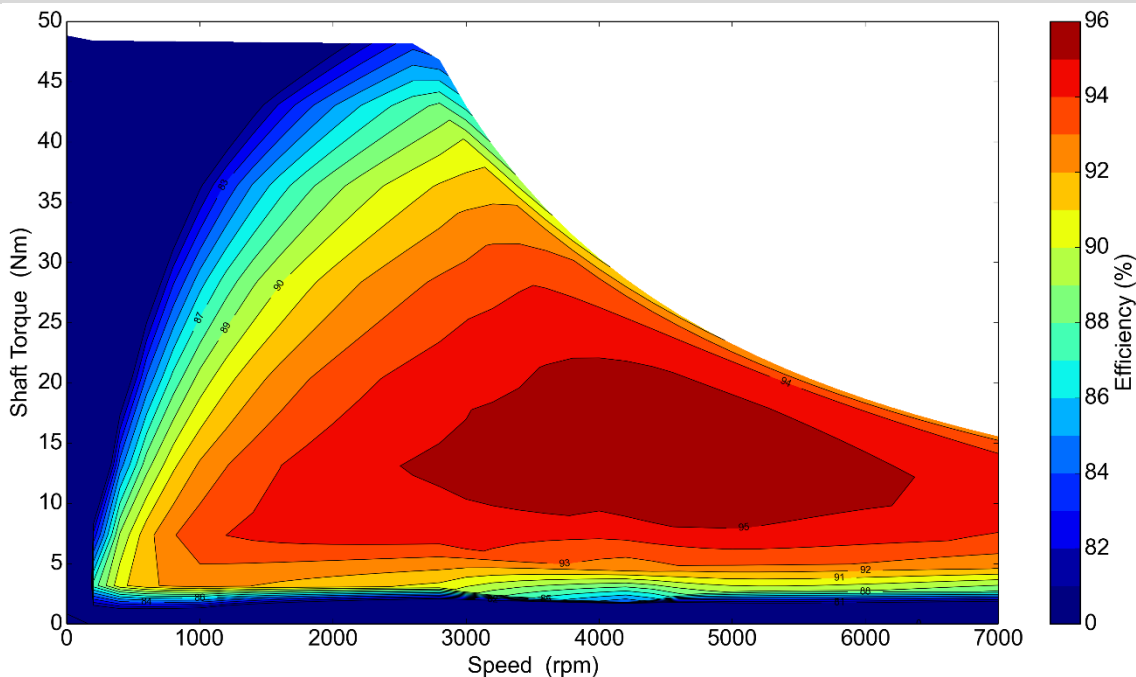

Nota bene / Disclaimer

Il presente documento ha il solo scopo di fornire un'indicazione generale delle prestazioni. In fase di scelta contattare Ufficio Tecnico e-comer®  
This document has only the purpose of providing a general indication of performance. In the phase of selection, please, contact Technical Department of e-comer.