



ELECTRIC POWERTRAIN SOLUTIONS

**SMAC SERIE**  
**TECHNICAL DATA SHEET**  
**3-PHASE SYNCHRONOUS MOTOR**

Code	51J20007028ET080400		
Rev.	02		
Date	03/03/2021		
Page	1	di	2


<b>Motor Rated Power</b>			<b>8000W</b>	
--------------------------	--	--	--------------	--

<b>Inverter Power Supply</b>			<b>48Vdc</b>	
------------------------------	--	--	--------------	--


<b>Description</b>	<b>Symbol</b>	<b>Unit</b>		
Duty	-	-	S2-60min	
Nominal Speed	$n_n$	rpm	2500	
Frequency (N° poles)	$f (2p)$	Hz	166.6 (8)	
Costant Voltage	$K_e$	Vrms/Krpm	13.0	
Costant Torque	$K_t$	Nm/Arms	0.21	
Instant Torque	$T_i$	Nm	94.0	
Instant Current	$I_i$	Arms	540.0	
Peak Torque S2-5min.	$T_p$	Nm	51.0	
Peak Current S2-5min.	$I_p$	Arms	250.0	
Rated Torque S2-60min.	$T_r$	Nm	32.0	
Rated Current S2-60min.	$I_r$	Arms	155.0	
Rotor Inertia	$J_r$	kg x m <sup>2</sup>	0.012	
Ambient Temperature	$\theta_a$	°C	-15 ÷ +40	
Protection Degree	IP		IP 54	up to IP67
Insulation Class	-	-	F	
Thermal protection	-	-	KTY 84-130	
Cooling system			Air	

Speed-Torque & Speed Power Motor Curves (\*)

SMAC 200-070 28

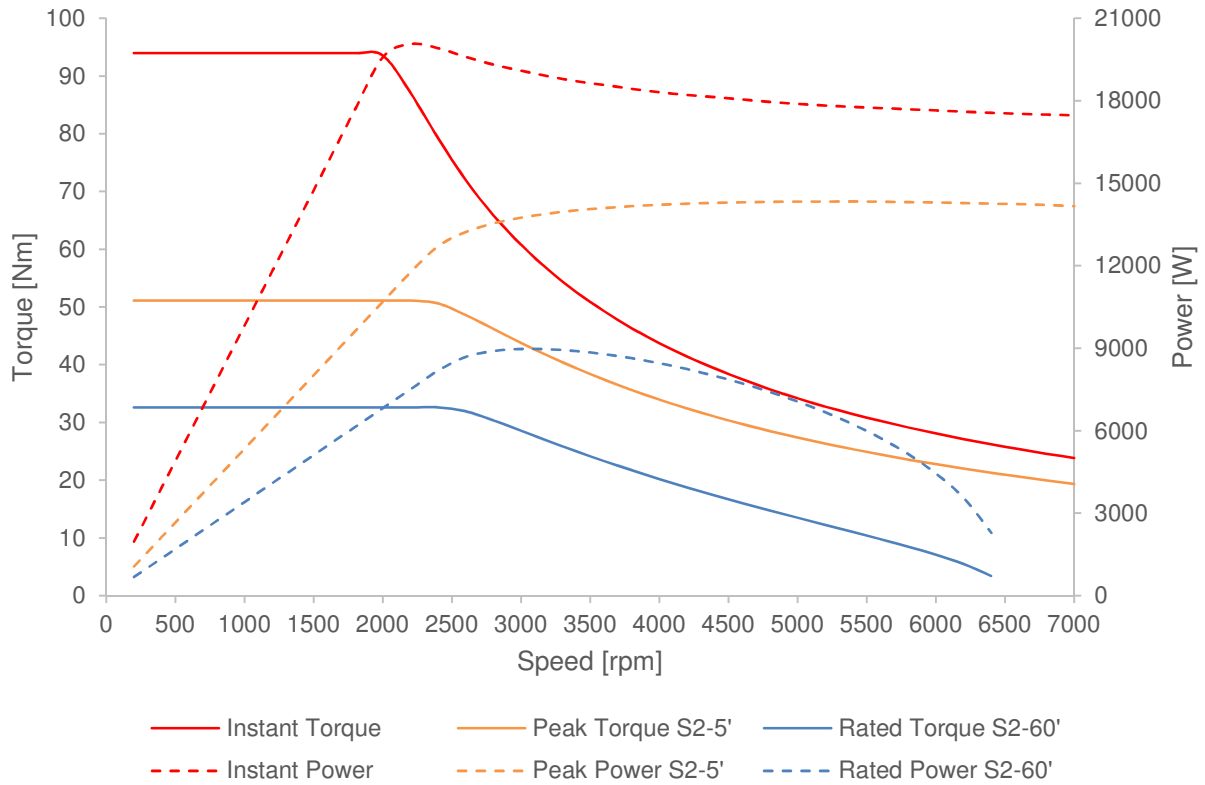

Efficiency Map % (\*)

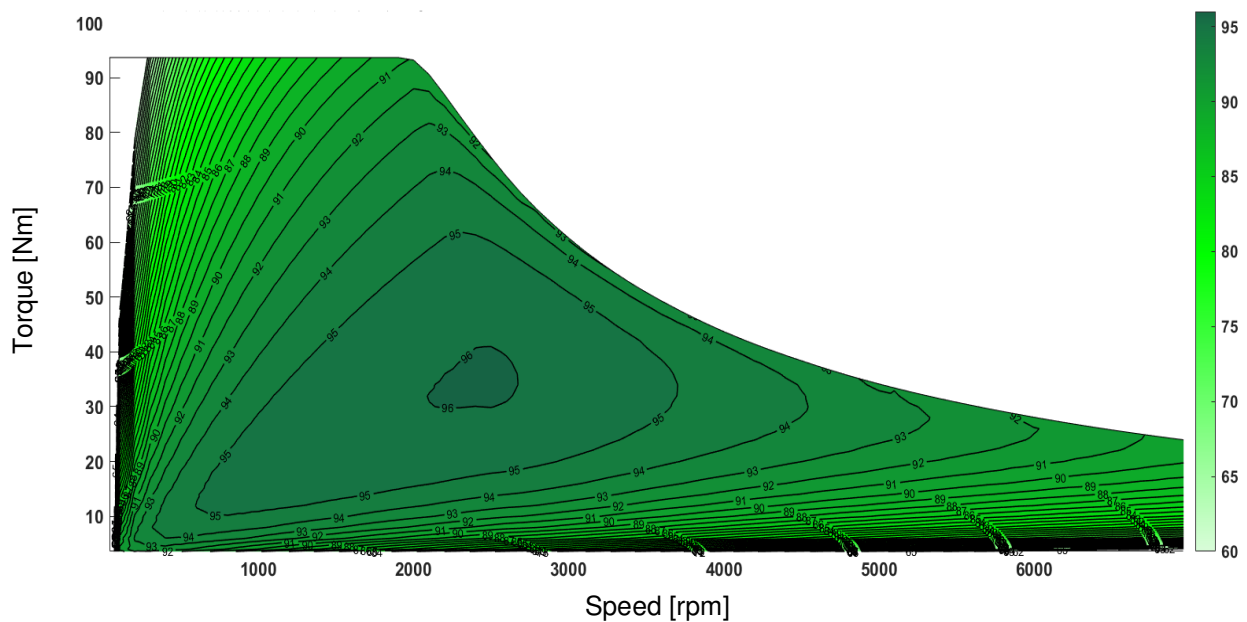

\* MTPA Field Weakening strategy control & Optimized Advance Angle